Quick Start Guide

LIFETIME WARRANTY

support@sineaudio.com.cn



Learn More About Us!









sineaudio.com.cn



www.youtube.com/@Saiyin-Riowois

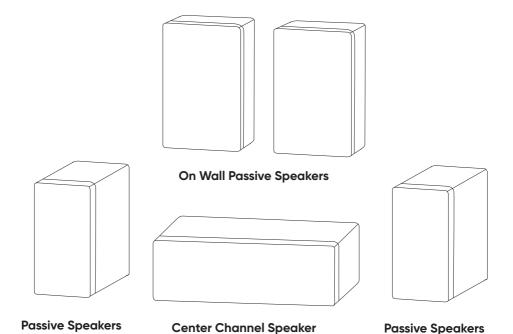


Step 1: Carefully Unpacking the Carton and Confirm that the following parts are Included

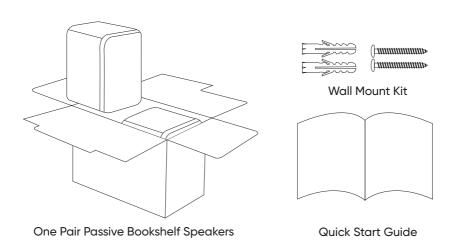

Step 2: Amplifier or Receiver and Speaker Wire are Required


Caution! Please choose the appropriate amplifier or receiver according to the output power of your passive speakers

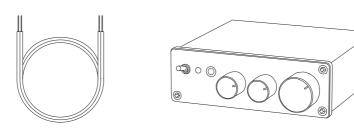


Speaker Wire (Not Included)
16-20 Gauge is Recommended

Amplifier or Receiver (Not Included)


Amplifier or Receiver is Required

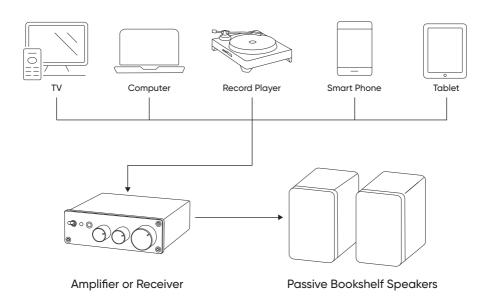

Connecting the Passive Speakers with Amplifier via Speaker Wire

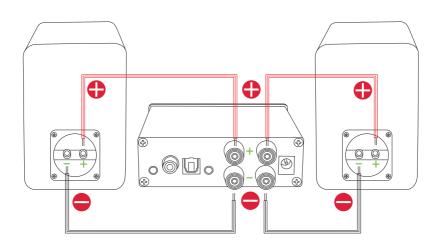

Speaker Placement in Surround Sound System

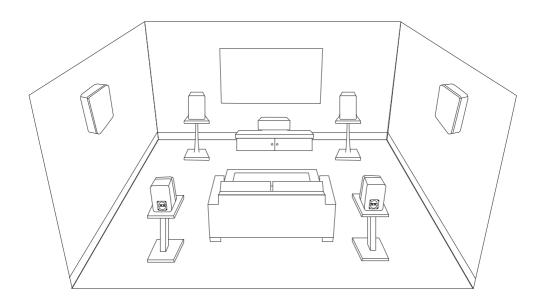

Tips: If you feel the bass is too heavy or the vocals are not enough, you can plug the bass-reflex hole with a sponge.

For speakers with rear ported design, please place them some distance from the rear wall for best effect.